

Technical Data Sheet
CONTRAST



Box Contents:

Contrast Cabinet | 3 glass shelves | 2x Wall hanging brackets | 6x wall plugs | 6x screws | Instructions booklet

Materials:

Carcass: Extruded Aluminium | Door: Mirror on MDF | Backboard: 3mm MDF
 Glass: 3mm PVC Backed

FAQ's:

	Units	CTC050	CTC065	CTC100
Recess dimensions (L x W)	mm	660.5 x 460	660.5 x 610	660.5 x 960
Internal dimensions (L x W x D)	mm	428 X 549 X 92.5	578 X 549 X 92.5	928 X 549 X 92.5
Shelf dimensions (L x W x D)	mm	420 x 85 x 5	570 x 85 x 5	920 x 85 x 5
Max shelf spacing	mm	500		
Distance between door hinges	mm	312		
Individual door dimensions (L x W x D)	mm	453 x 653 x 6	301 x 653 x 6	476 x 653 x 6
Door opening angle	°	95		
Depth with door fully open	mm	573	421	596
Hanging bracket centres	mm	413	563	913
What is the thickness of the mirror glass?	mm	3mm		
Is the cabinet IP44 rated?	-	Yes		
What size fuse should I use?	-	Seek the advice of an electrician		
What is the total power consumption?	W	50.6	73.5	80.2
Does the mirror have an energy rating?	-	A		
What is the colour of the light and the Kelvin rating?	K	2700k - 6400K		
What is the wattage of the lights?	W	23	26	33
Where is the slider controller switch located?	-	Underneath - Right side		
Can the LED lighting be replaced?	-	No		
Can the slider controller switch be replaced?	-	No		
What is the output of the demister pad?	W	20	40	40
What are the dimensions of the demister pad?	mm	230 x 300	230 x 300 (2pcs)	230 x 300 (2pcs)
How do I turn on the demister pad?	-	The demister pad will turn on when the LEDs are turned on.		
Are illuminated mirrors supplied with mains cable?	-	All illuminated mirrors are supplied with a removeable 500mm mains cable. There is ample storage for excess cable in the back of the unit.		


10 Year Guarantee

We have complete confidence in this Roper Rhodes bathroom Mirror and as such it is offered with a 10-year guarantee against defects in manufacture. The electronics are covered by our 2-year guarantee. In the unlikely event that this product should fail during the guarantee period we will either replace the faulty part or the complete unit as appropriate.


*Dimensions are subject to change; customers are advised to measure actual product before commencing installation.

**Fixing point dimensions are for guidance only/the positions of wall fixing must be checked when product is received.

CTC050

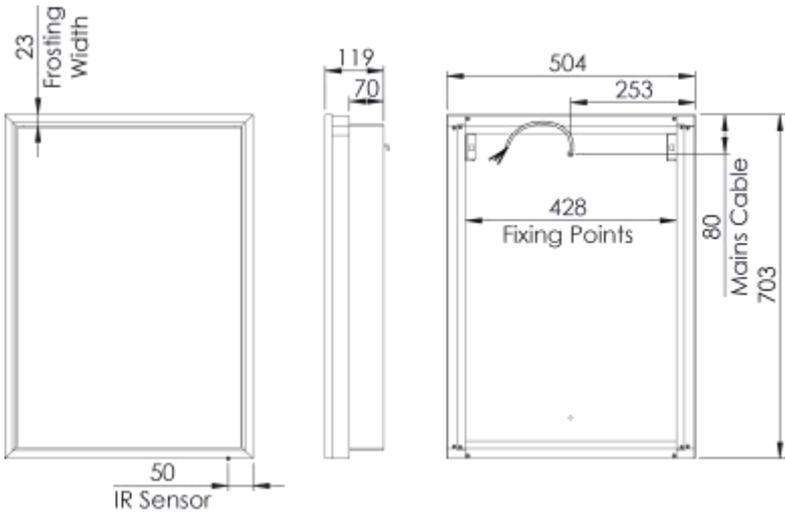

CTC065

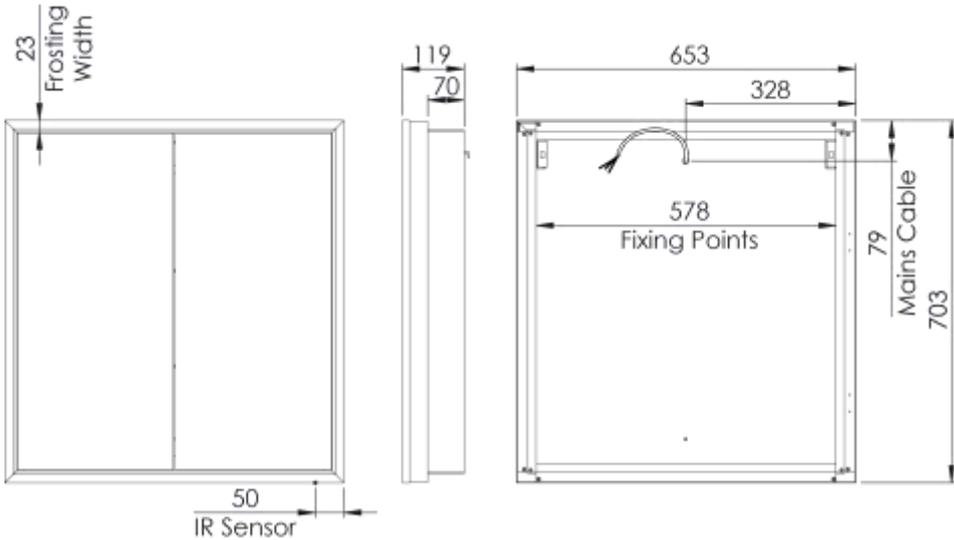

CTC100

