


Technical Data Sheet

SYSTEM

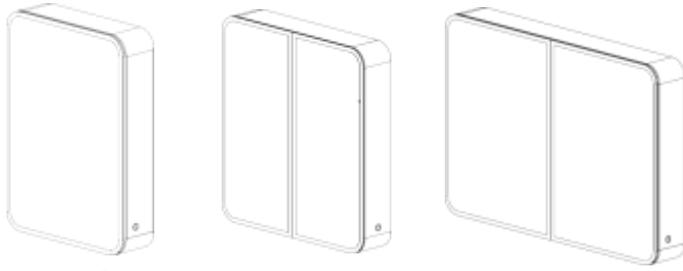

Box Contents:

System Cabinet | 2 glass shelves | 2x Wall hanging brackets | 4x wall plugs | 4x screws | Instructions booklet

Materials:

Carcass: Extruded Aluminium | Door: Double sided mirror
Glass: 3mm PVC Backed

FAQ's:

	Units	SYC050	SYC060	SYC100
Internal dimensions (L x W x D)	mm	470 x 670 x 111	570 x 670 x 111	970 x 670 x 111
Shelf dimensions (L x W x D)	mm	466 x 100 x 5	566 x 100 x 5	966 x 100 x 5
Max shelf spacing	mm	280		
Distance between door hinges	mm	414		
Individual door dimensions (L x W x D)	mm	500x700x11	299.5x700x11	499.5x700x11
Max door opening angle	°	125 Max		
Max depth with door open	mm	626	425.5	625.5
Hanging bracket centres	mm	282	382	782
What is the thickness of the mirror glass?	mm	3 x 2		
Is the cabinet IP44 rated?	-	Yes – suitable for use in bathroom zone 2		
What size fuse should I use?	-	Seek the advice of an electrician		
What is the total power consumption?	W	59.1	64.9	86.5
Does the cabinet have an energy rating?	-	Yes – It has an energy rating of: A		
What is the colour of the light and the Kelvin rating?	K	3000-6000		
What is the wattage of the lights?	W	16.6	18.4	24
Where is the IR sensor/rocker switch located?	-	Right Hand Side		
Can the LED lighting be replaced?	-	No		
Can the IR sensor be replaced?	-	No		
What is the output of the demister pad?	W	12	16	32
What are the dimensions of the demister pad?	mm	400 x 150	400 x 150	400 x 300
How do I turn on the demister pad?	-	The demister pad will turn on when the LEDs are turned on.		
Are illuminated cabinets supplied with mains cable?	-	All illuminated cabinets are supplied with a removeable 500mm mains cable. There is ample storage for excess cable in the back of the unit.		


10 Year Guarantee

We have complete confidence in this Roper Rhodes bathroom Cabinet and as such it is offered with a 10-year guarantee against defects in manufacture. The electronics are covered by our 2-year guarantee. In the unlikely event that this product should fail during the guarantee period we will either replace the faulty part or the complete unit as appropriate.


*Dimensions are subject to change, customers are advised to measure actual product before commencing installation.

**Fixing point dimensions are for guidance only/the positions of wall fixing must be checked when product is received.

SYC050

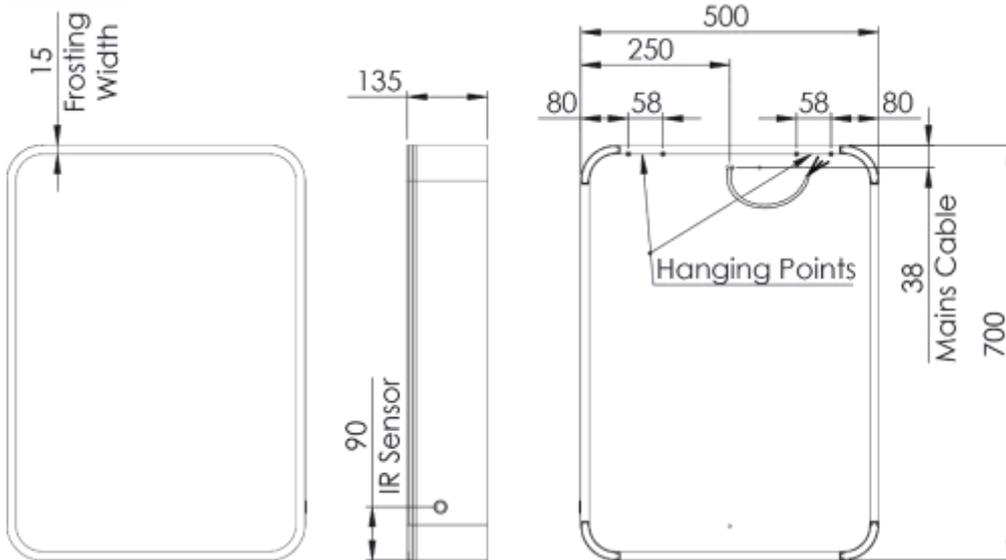

SYC060

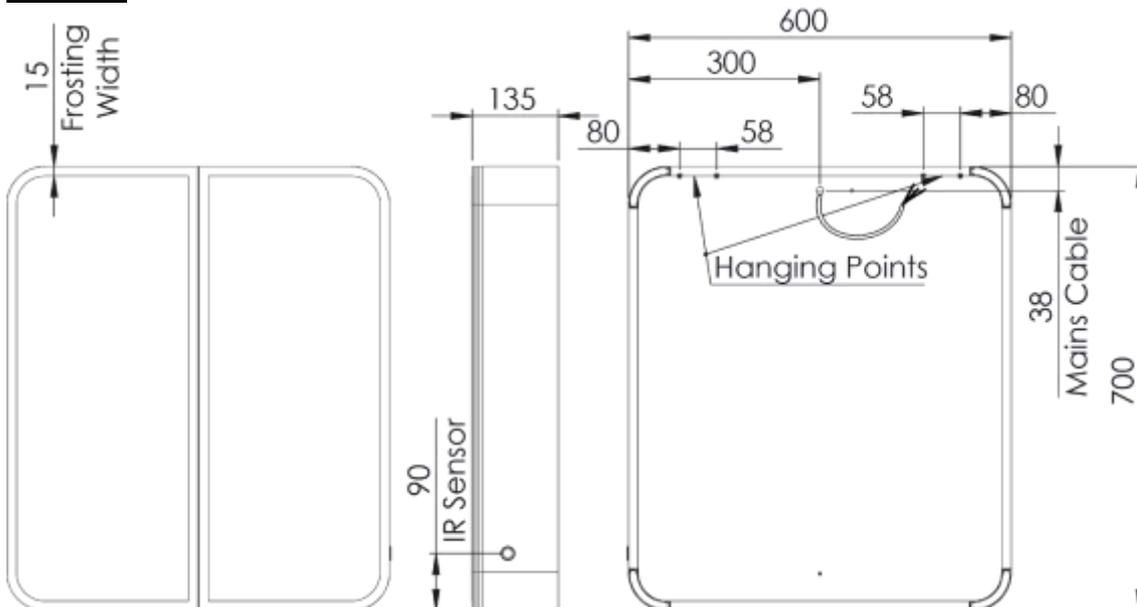

SYC100

