


Product code  
TU50AL

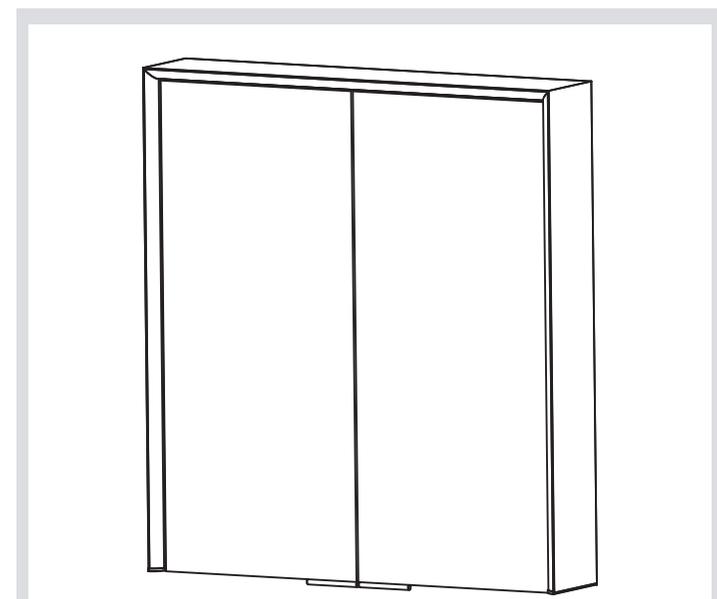

Product code  
CP65AL

**ELECTRICAL SAFETY INSTRUCTIONS** (Applicable to UK Installations only)

All fittings must be installed by a competent person, in accordance with current IEE wiring regulations. If in doubt consult a qualified electrician.

**IMPORTANT**

Always switch off the electrical supply at the mains during installation and maintenance. It is recommended that the fuse is withdrawn or the circuit breaker is switched off for the necessary circuit before installation commences.

Fitting in Bathrooms is subject to the appropriate zone in accordance with IEE Regulations. This product is suitable for outside zones. It IS NOT suitable for installation in Zone 0 and Zone 1. It is also not suitable for installation in saunas, steam rooms or shower cubicles. This product is only suitable for permanent installation. DO NOT connect to a trailing plug and socket outlet. This product is only suitable for indoor use. Do not attach the product to surfaces that are damp or otherwise electrically conductive.

**INSTALLATION CARE & SAFETY**

Wear suitable eye protection when drilling. Take care when using power tools near water - the use of a residual current device (RCD) is advised. Beware of hidden cables or pipes. Take care if drilling on tiled surfaces in case the drill slips. A piece of masking tape applied to the wall before marking out the fixing holes will stop the drill from wandering.

**IMPORTANT**

The product must be installed with a minimum distance of 150mm between the infrared sensor and an adjacent wall or obstruction to ensure correct function of the sensor (see diagram below).

The LED lighting is operated by the IR sensor located on the underside of the cabinet on the far right hand side.

**CLEANING**


It is recommended that the unit is cleaned with a soft, dry, non abrasive cloth when turned off. Never use cleaning agents or abrasive materials on any type of surface finish. Do not allow moisture to come into contact with the electrical components.

**MAINTENANCE**

If the LED strip fails please contact the Roper Rhodes sales office using the contact details at the bottom of this page, stating the cabinet model and product code (codes on opposite side of the page).

DO NOT strike glass components with hard or pointed items. DO NOT place very hot or very cold items against or in close proximity to glass surfaces unless an adequately thick insulation material is used to prevent such items coming in contact with the glass.

The nominal thickness of the mirror glass used in this product is 6mm and is film backed for safety. If the glass becomes chipped or broken replace immediately. For replacement glass and other components contact customer services at the address below.

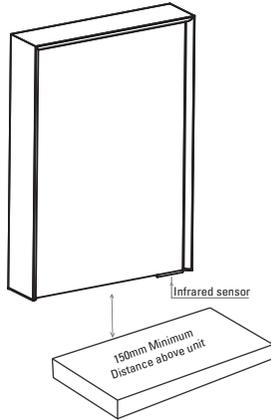

Troubleshooting

**“There is no sound from my CABINET.”**

- The volume on your device is muted or turned down.
- There is a problem with the Bluetooth® connection - try erasing the connection on the audio device and then re-pairing.
- There may be interference from other nearby Bluetooth® enabled devices - try turning them off.
- The connected devices are too far apart and out of range - try moving the devices closer together.

**“I cannot pair the CABINET with my Bluetooth® device.”**

- The cabinet may not be in pairing mode – to do this turn the rocker switch on located on the underside of the cabinet. The indicator light located on the inside lower right hand side will flash quickly to confirm pairing mode.
- The Bluetooth® capability of your chosen device is turned off or out of range.
- There was a problem during pairing - some devices will pair automatically when selected some will require a pass code or acceptance of the connection before they will finalise the pairing.
- Refer to your Bluetooth® device’s instruction manual to ensure it supports the A2DP (stereo Bluetooth®) profile.
- If attempting to connect to a PC or Mac computer, ensure that your cabinet is set as the audio output device within the audio settings menu of the device. You may need to play a track to finalise the connection.

**“The sound quality is poor.”**

- Your Bluetooth® device may be close to being out of range and should be moved closer to the cabinet.
- For those devices that support the use of Applications, there may be too many running in the background which can affect the amount of internal resources available on the device to transmit audio. Closing any non-essential applications may improve audio quality.
- Similarly, if the selected device has Wi-Fi capabilities, turning this off may improve audio quality.
- There could have been a problem during the initial pairing of devices. Erase the connection using your Bluetooth® device and re-pair.
- For those devices with in-built sound equalisation, adjusting these settings can greatly improve the sound quality of any audio played through your cabinet.

**“My CABINET is not automatically reconnecting with my Bluetooth® device.”**

- The mirror will automatically reconnect with paired devices when both devices Bluetooth® capabilities are turned on. Depending on the manufacturer of the Bluetooth® device, the order in which the devices are turned on to automatically connect may vary. In some cases it will be necessary to turn on Bluetooth® capabilities on the audio device before turning on the cabinet.


Pairing Bluetooth® enabled devices:

Pairing occurs when two Bluetooth® wireless technology enabled devices communicate with each other and establish a connection. This information is then stored in the memory of each device meaning that once initially connected, the two devices will not need to pair again.

Your CABINET can link with up to seven separate devices. When this limit is reached any additional devices paired will erase previous connections to accommodate the new pairing.

Connecting your Bluetooth® enabled device to your CABINET:

1. It is recommended that the Bluetooth® connectivity of the device you want to pair with your CABINET is turned on first to make connection easier.

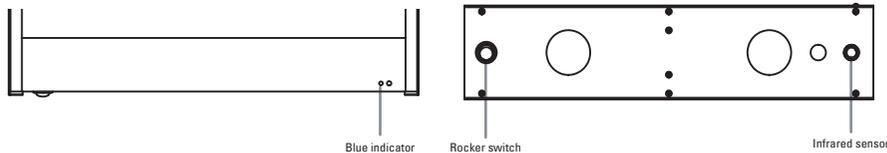

2. Turn on the Bluetooth® switch located on the underside of the cabinet on the far left hand side, once this has been switched on the blue indicator light located on the inside of the cabinet in the lower right corner will illuminate stating the system is in pairing mode and the cabinet is discoverable.

3. On the selected Bluetooth® enabled device select 'Bluetooth' from the Bluetooth® device list to connect to the cabinet.

Note: Devices running Bluetooth® Version 2.0 or earlier may need to enter a pairing code before a connection is made. This code is a device default of 0000 or 1234. These devices will not need to enter a pairing code again after the initial set-up. Some devices may also ask for the connection to be accepted, which will be prompted on the device screen.

4. The blue indicator light will start flashing to state the connection has been made between the two Bluetooth® enabled devices.

5. Once connected, any music played on the paired device will play through the CABINET.

The Bluetooth® connection will automatically cease when the two paired devices are out of range.

To turn off the Bluetooth® functionality simply turn off the rocker switch on the underside of the cabinet on the left hand side.

COMPLIANCE

This product complies with the following safety standards:  
 BS EN 60598-1: 2004, EN 60598-2-1: 1989, BS EN 60598-2-2: 1997 & Amd 1. BS 7449: (1991).  
 BS EN 14749: (2005), IP44 rated in accordance with BS60529:1992 & BS EN 60068-2-18.

WIRING


This product is manufactured to class I category and must have an earth connection.


COLOUR CODING:

- L - Live = Brown
- N - Neutral = Blue
- ⊕ - Earth = Green & Yellow

LIGHTS


LED

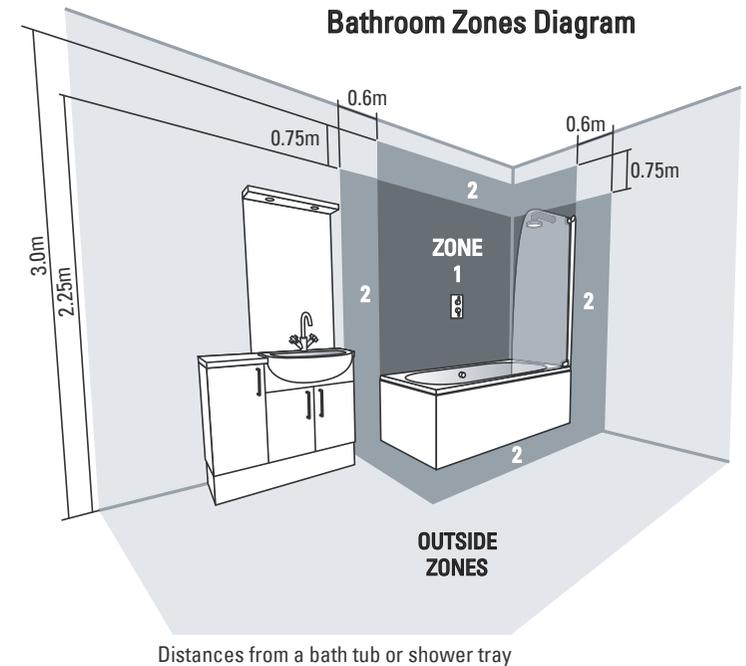

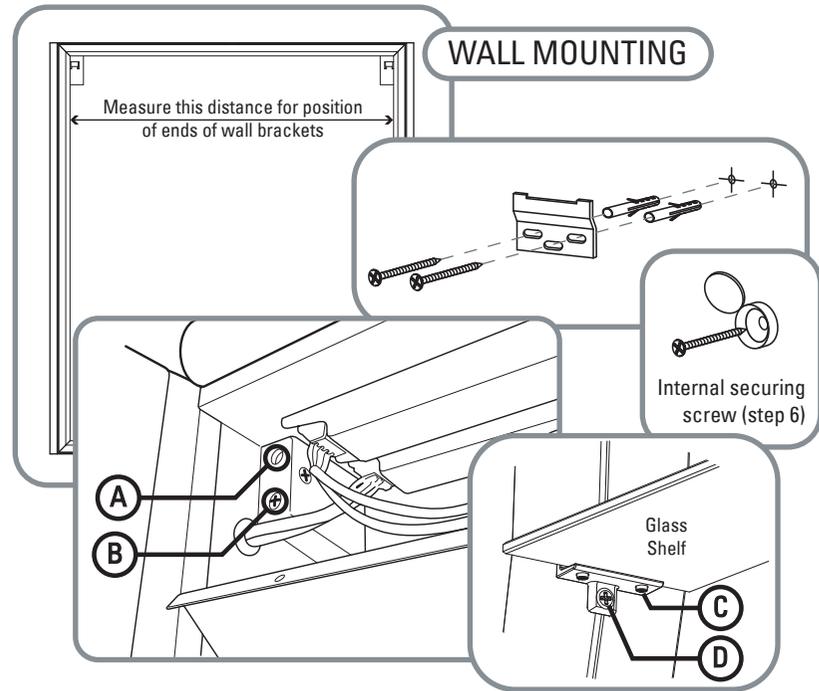

## INSTALLATION PROCEDURE

- 1) Remove the packaging taking special care with the doors and separate shelves. Open the cabinet doors and ensuring you haven't connected the power remove the screws on the front edge and lower the cover. Take care not to lose the screws.
- 2) Using a spirit level, mark off a horizontal line approximately 70mm below where the top of the cabinet is to be. Position the bracket hole centres so that they are centred on the line, and ensure that the ends of the brackets are spaced to the width between the inner edges of the vertical aluminium extrusions (see illustration). Mark off the holes using a pencil.
- 3) Note: Wall plugs supplied are only suitable for solid stone / brick walls. For plasterboard walls use specialist wall plugs, available from DIY or hardware stores. Seek advice from a specialist about the suitability of fixings to be used. Drill the required holes and insert wall plugs.
- 4) Screw the brackets to the wall using the screws provided. Please ensure the screws are fully tight but take care not to overtighten. Two screws must be used in each bracket.
- 5) Before making any electrical connections (or performing any maintenance) it is necessary to turn off the mains electricity supply. This unit is provided with a supply cable already fitted. This cable should be fitted to the household lighting circuit or to a fused 3 AMP supply. Connections should be made in accordance with the latest IEE regulations. This cabinet is manufactured to CLASS 1 and requires an earth connection.

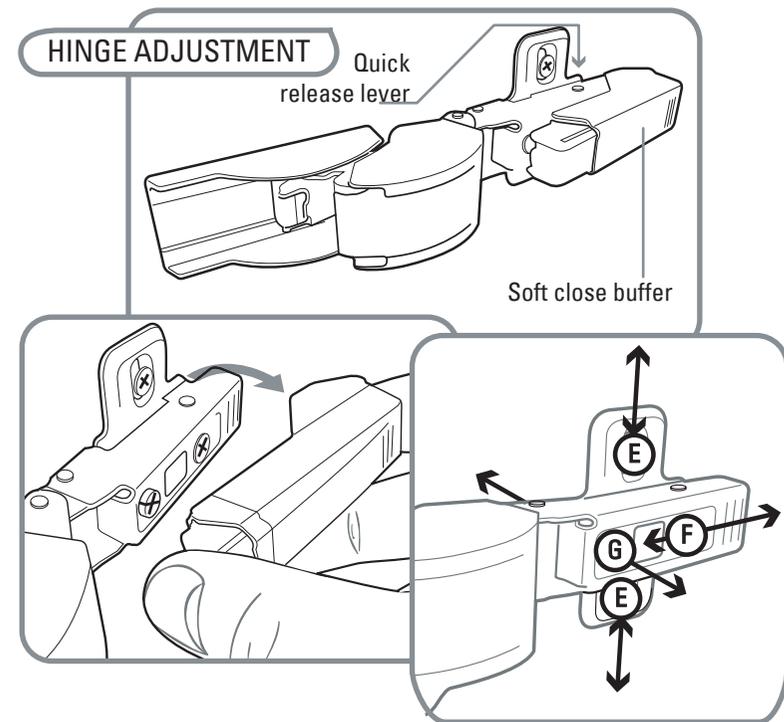

- 6) Hang the cabinet on the wall brackets. The claws on the cabinet hangers must be securely located on the wall brackets. Using a spirit level adjust the angle of the cabinet by turning screw A with a cross head screwdriver. When the angle is properly adjusted, screw through the lower section of the cabinet backboard and mark the wall. Remove the cabinet from the wall, drill a suitable hole in the marked location and fit a wall plug. Re-hang the cabinet making sure to tighten screw B on both hangers and secure the base of the cabinet to the wall with the supplied screw and cover-cap. The cabinet should not be left unattended until it is fully secure.
- 7) When the cabinet is fully secure the internal top cover should be closed and secured with the small screws removed earlier. When the cover is closed and secure restore the mains power and test the function of the lights and the shaver socket. If the light fails to function properly it is likely the IR sensor has been positioned too close to an adjacent wall or reflective surface.
- 8) Fitting the glass shelves. Firstly insert a shelf into the top two shelf support brackets then slide upwards so the grub screws on the underside of the support brackets (Screw C) can be sufficiently tightened to hold glass in place. Repeat for the bottom shelf (NOTE: be careful not to overtighten). Shelves can be positioned accordingly by sliding the supports up or down. (NOTE: Take care to use both hands when sliding shelves and ensure that support brackets at both ends slide simultaneously). Once shelves are in their desired locations turn screw D to secure in position. A spirit level should be used to ensure shelves are level.
- 9) If the doors are out of alignment first remove the soft-close buffer (from the relevant hinges) which clips into the main hinge plate. The soft-close hinges offer adjustment in 3 directions via adjustment screws E, F and G (see diagram).
- 10) Remove the protective strip from adhesive strip on the back of the magnetic bar and fix to desired position within the cabinet. (Ensure the bar does prevent the door(s) from closing Metal accessories e.g. scissors / tweezers can then be kept on the bar.

NOTE: DO NOT ADHERE MAGNETIC STORAGE BAR TO EITHER SIDE OF THE DOORS AS OBJECTS MAY COME UNSTUCK WHEN OPENING / CLOSING CABINET.