

## VAULT CABINETS

**BOX CONTENTS:** VAULT Cabinet | Instructions booklet | 4 x Smoked Glass Shelves | 1x Wall Bracket | Fixing Kit | 1x Keep Clean Mat

### FAQ's

	Units	VTC050 VTC050-XX	VTC065 VTC065-XX	VTC080 VTC080-XX	VTC100 VTC100-XX
Recess dimensions (L x W x D)	mm	473 x 673 x 85	623 x 673 x 85	773 x 673 x 85	973 x 673 x 85
Internal dimensions (L x W x D)	mm	190 x 640 x 91	265 x 640 x 91	340 x 640 x 91	440 x 640 x 91
Shelf dimensions (L x W x D)	mm	182 x 70 x 5	257 x 70 x 5	332 x 70 x 5	432 x 70 x 5
Max shelf spacing	mm	315			
Distance between door hinges	mm	510			
Individual door dimensions (L x W x D)	mm	466 x 666 x 6	(2x) 306 x 666 x 6	(2x) 382 x 666 x 6	(2x) 482 x 666 x 6
Door opening angle	°	90			
Depth with door fully open	mm	578	419	494	594
Hanging bracket dimensions	mm	430	580	730	930
What is the thickness of the mirror glass?	mm	3+3			
Does the cabinet come with side panels?	-	No. Cabinet Side Panels (Mirror/Black/Colour matched) can be purchased separate.			
Where is the switch sensor located?	-	Touch Bar underneath the cabinet			
Can the LED lighting be replaced?	-	No			
Can the switch sensor be replaced?	-	No			
What size fuse should I use?		Seek advice from an electrician			
How do I turn on the demister pad?	-	The demister pad will turn on when the LEDs are turned on.			
Are illuminated cabinets/mirrors supplied with mains cable?	-	All illuminated cabinets/mirrors are supplied with a removeable 500mm mains cable. There is ample storage for excess cable in the back of the unit.			

Please note:

- Dimensions are subject to change. Customers are advised to measure actual product dimensions before commencing installation.
- Fixing point dimensions are for guidance only/the positions of wall fixing must be checked when product is received.
- The LED (lm) values represent the output of the LED. Actual product level Lumen output may vary depending on the diffuser material i.e., glass or acrylic.


# TECHNICAL DATA SHEET

## ELECTRICAL SPECIFICATION

	Input Voltage	Lamp Type	Total Wattage (LED & Demist)	Demist (W)	Demist Size (mm)	LEDs (W)	LED (lm)	Energy Rating	CCT (K)	CRI	IP Rating	Electrical Class
VTC050	220-240V 50Hz	12V DC LED Lamp	79.00	25	200*300	24.00	1728	G	3000-4000-6000	85	IP44	Class I
VTC065	220-240V 50Hz	12V DC LED Lamp	106.50	50	200*300 (x2)	26.50	1944	G	3000-4000-6000	85	IP44	Class I
VTC080	220-240V 50Hz	12V DC LED Lamp	110.00	50	200*300 (x2)	30.00	2160	G	3000-4000-6000	85	IP44	Class I
VTC100	220-240V 50Hz	12V DC LED Lamp	114.00	50	200*300 (x2)	34.00	2448	G	3000-4000-6000	85	IP44	Class I

## TECHNICAL DRAWINGS


### VTC050

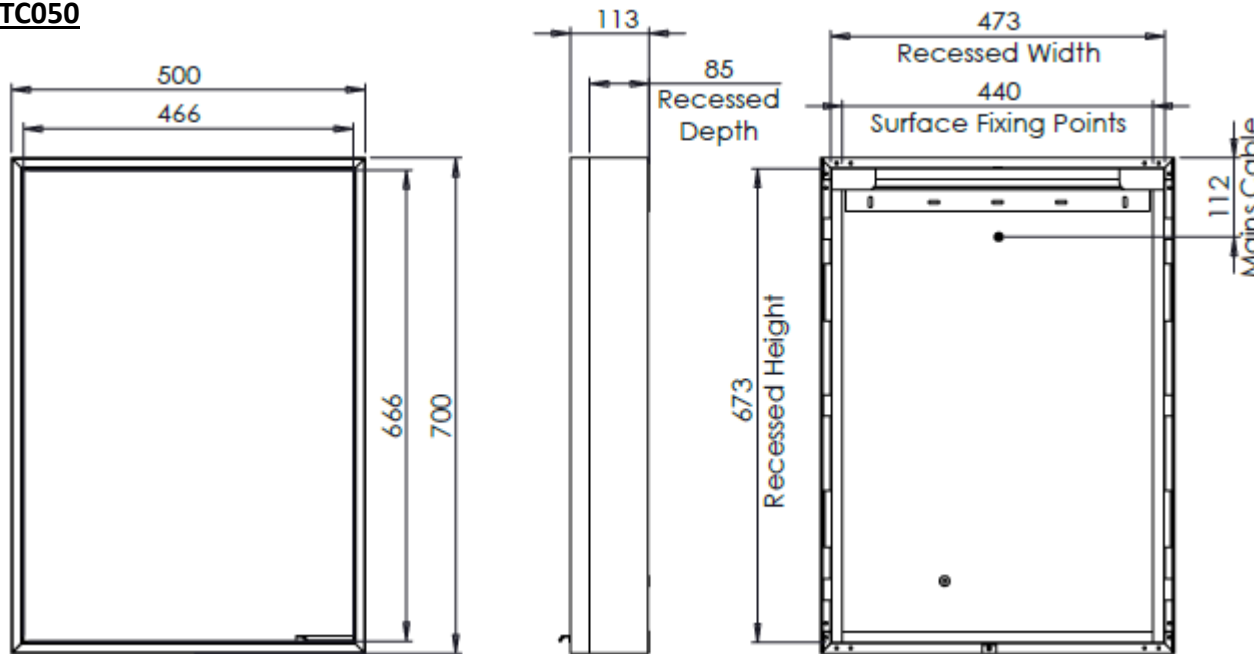


# TECHNICAL DATA SHEET

# ROPER RHODES®

## VTC065

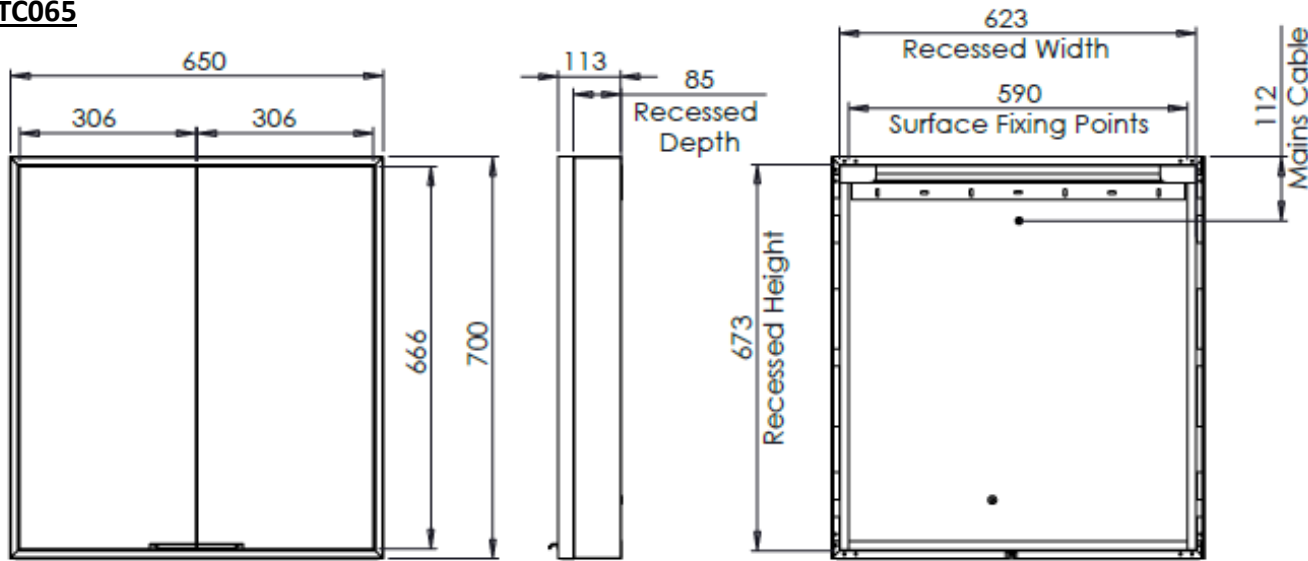

## VTC080

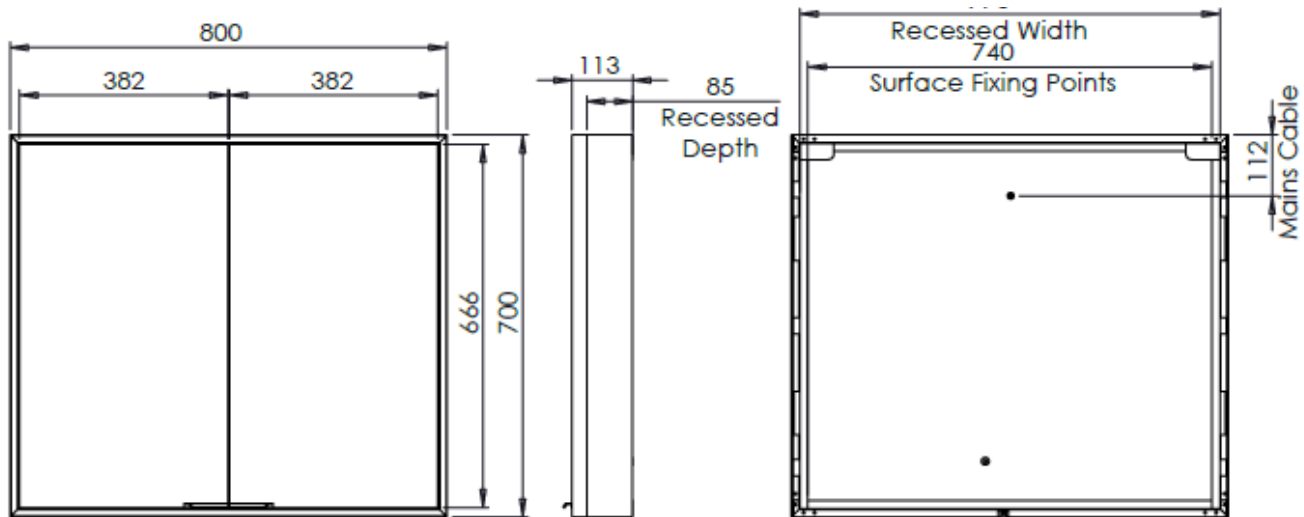

# TECHNICAL DATA SHEET

# ROPER RHODES®

## VTC100

